Product datasheet

Specifications		
Green Premium"	Rack ATS, 200/208V in, (8) C13 (1) C19 or	
0-(AP4430	
	Discontinued on: 09 Jun 2023	
① Discont	ued	
Overview		
Lead Time	Jsually in Stock	
Main		
Main Input Voltage	200 V 208 V	
Main Output Voltage	200 V 208 V	
Input Connection Type	NEMA L6-20P	
Number Of Rack Unit	1U	
Cable Length	2.44 m	
Number Of Cables	2	
Provided Equipment	Mounting hardware Rack mounting brackets RS-232 configuration cable	
Physical		
Height	4.4 cm	
Width	43.2 cm	
Depth	23.6 cm	
Net Weight	4.83 kg	
Mounting Location	Front Rear	
Mounting Preference	No preference	
Mounting Mode	Rack-mounted	
Input		
Network Frequency	50/60 Hz	
[In] Rated Current	16 A	
Max Line Current	20 A	
Input Current Limits	20 A	
Load Capacity	3300 VA	

Output

Max Current Draw



Number Of Power Socket Outlets	8 IEC 60320 C13
	1 IEC 60320 C19

Protection Type

Without circuit breaker

Conformance

Standards	EN 55022 class A
	FCC part 15 class A

Environmental

Ambient Air Temperature For Operation	-545 °C
Relative Humidity	595 %
Operating Altitude	010000 ft
Ambient Air Temperature For Storage	-2565 °C
Storage Relative Humidity	595 %
Storage Altitude	0.0015240.00 m

Packing Units

Unit Type Of Package 1	PCE
Number Of Units In Package 1	1
Package 1 Height	11.4 cm
Package 1 Width	35.6 cm
Package 1 Length	60 cm
Package 1 Weight	6.6 kg

Contractual warranty

Warranty


2 years repair or replace

Life Is On by Schneider Electric

26 Apr 2024

Sustainability

Green PremiumTM label is Schneider Electric's commitment to delivering products with best-inclass environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO₂ products.

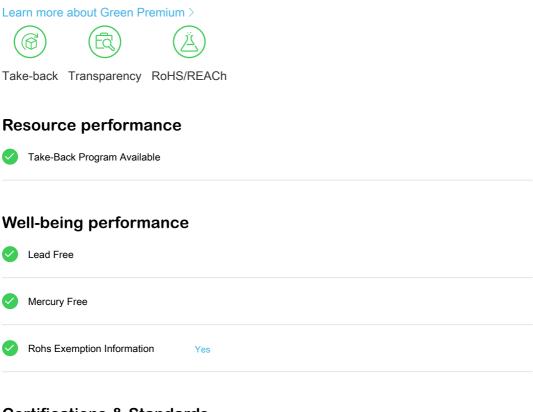

Certifications & Standards

Reach Regulation	REACh Declaration
Eu Rohs Directive	Compliant with Exemptions
Environmental Disclosure	Product Environmental Profile
Circularity Profile	End of Life Information



